
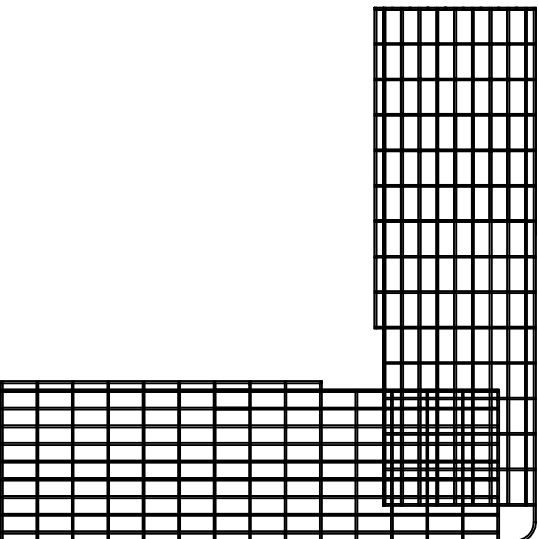


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

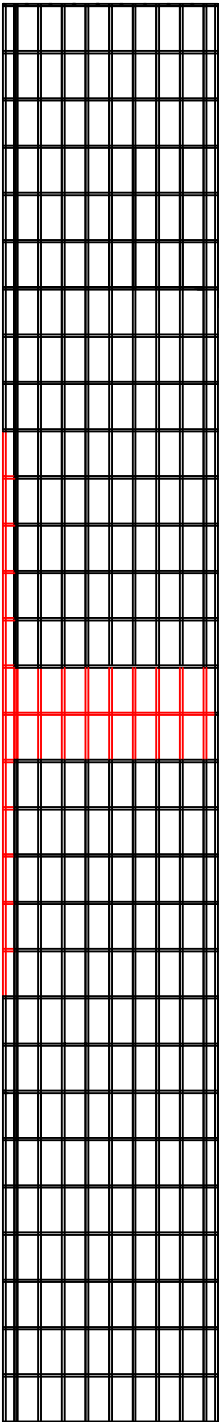

- GENERAL NOTES:**
- A) Material:
 1. Regular Galvanized Wire Per ASTM A641
 2. Carbon Steel Bright Basic Wire Per ASTM A510 Grade 1008
 3. 304 & 316 Stainless Steel
 - B) Finish: (Carbon Steel Wire Only)
 1. Electrodeposited Zinc, Type III Finish
 2. Polyester Powder Coating 1/2 - 3.0 mils thick
 - C) Dimensional Tolerances:
 1. General Dimensions: +/- 1/8" UNCL.
 2. Length: +/- 1/4"
 3. Width: +/- 1/8"
 4. Depth: +/- 1/8"
 5. Angular Formation: +/- 3', -0
 6. Camber: Shall not exceed 1/2" on standard 10' length
 7. Twist: Shall not exceed 1/2" on standard 10' length
 - D) Rib Wire Diameter
 1. .197" (5mm) Diameter
 - E) Longitudinal Wire Diameter
 1. .197" (5mm) Diameter
 2. .235" (6mm) Diameter
 - F) Gross Section Area

Area = (18 Wires)(.0438 in²) = .7884 in²

UL Marking = .4 in²

WBT LLC

18 in 90° Horizontal

This drawing in design and detail is the property of WBT, LLC, and must not be used except in connection with our work. All rights of design or invention are reserved.

CN		SIZE	Date:	REV
A		1-22-09		
SCALE	1:16	SHEET	1	of 1