| REVISIONS | | | | |
|---|---|---|---|---|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |

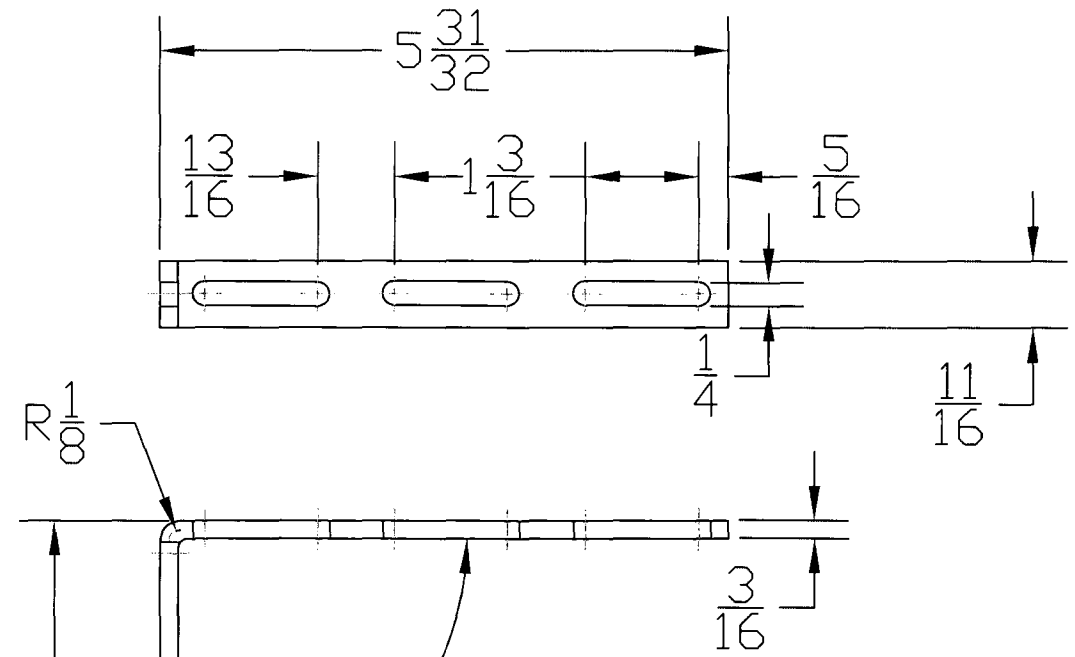


## General Notes:

1) Material:
   A) Material to be comercial quality Mill Galvanized steel per ASTM A653 Coating
Min Yield= 33 KSI
   B) Material to be commercial hot rolled pickled & oiled steel per ASTM A569
   B) To be type 316L 2B finish or 316 2B finish, fully annealed stainless
Min Yield = 35 KSI
2) Dimensional Tolerances
   A) General: ± 1/16"
   B) Hole / Slot Location: ± 1/32"
   C) Angularity: ± 2°
3) All Units Inches
4)Finish Options:
   A) Electro-galvanized per ASTM B633-SC1 Type 3
   B) Black zinc
5) Material Thickness (Nom): 3/16 = .1875

## NOTE:

Corner Splice consists of 2 Corner Splice Bars and 8 sets of the Splice Kit.



WBT LLC

This drawing in design and detail is the property of WBT, LLC. and must be used except in connection with our work. All rights of design or invention are reserved.

# Corner Splice

| | | | |
|---|---|---|---|
| CN | SIZE A | Date: 10-06-08 | DWG NO. |
| | SCALE 1:2 | | SHEET |

REV