
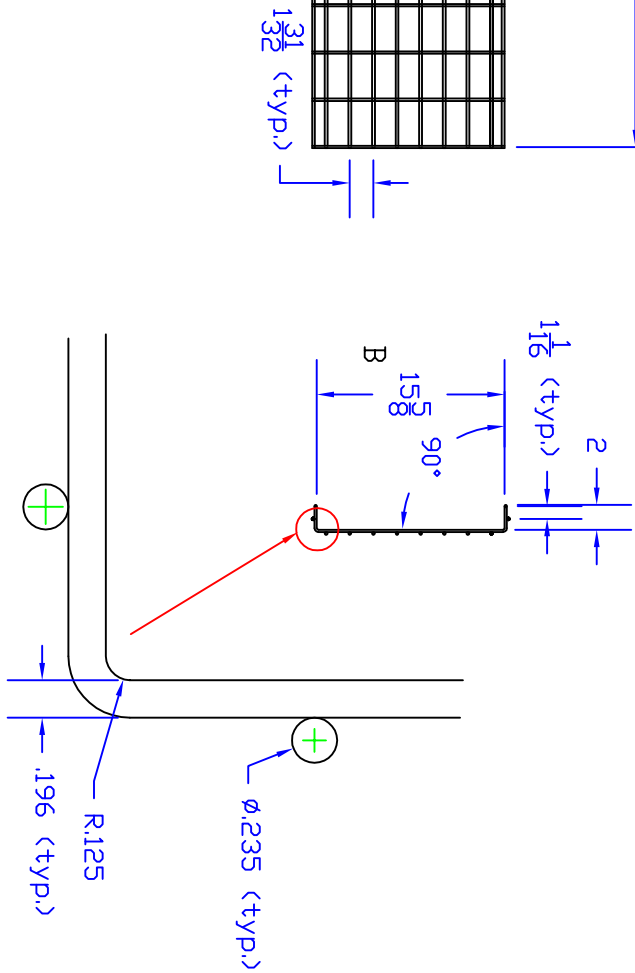


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A.	The Overall length	12/12/08	
	B.	The Overall width	7/29/09	

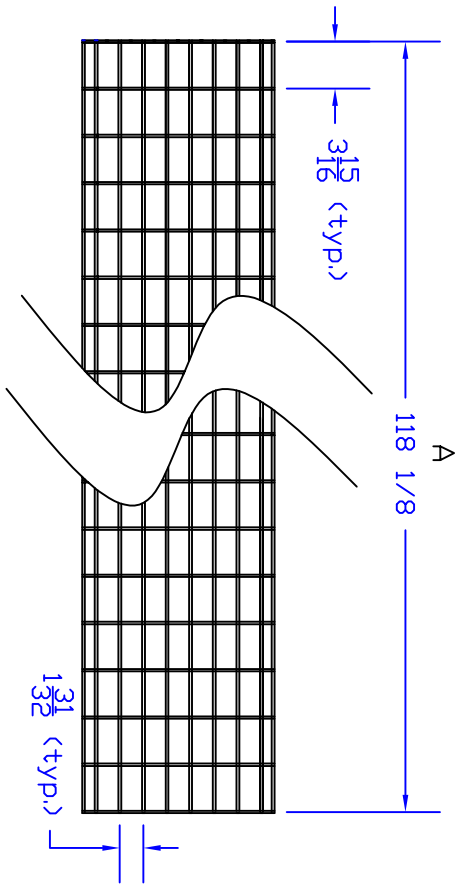

GENERAL NOTES:

- A) Material:
 1. Regular Galvanized Wire Per ASTM A641
 2. Carbon Steel Brite Basic Wire Per ASTM A510 Grade 1008
 3. 304 & 316 Stainless Steel
- B) Finish: (Carbon Steel Wire Only)
 1. Electrodeposited Zinc, Type III Finish
 2. Service Condition (one) per ASTM B633
 3. Polyester Powder Coating 12 - 3.0 mils thick
- C) Dimensional Tolerances:
 1. General Dimensions: +/- 1/8" UNL
 2. Length: +/- 1/4"
 3. Width: +/- 1/8"
 4. Depth: +/- 1/8"
- D) Angular Formation: +/- 3', -0
- E) Camber: Shall not exceed 1/2" on standard 10' length
- F) Twist: Shall not exceed 1/2" on standard 10' length
- G) Rib Wire Diameter:
 1. 19/32 (5mm) Diameter
- H) Longitudinal Wire Diameter:
 1. .235" (6mm) Diameter
- I) Cross Section Area:
 1. Area = (12 Wires)(0.438 in²) = .5256 in²
 2. UL Marking = 4 in²
- J) Weight = 23 lbs.

WBT LLC

WBT 2x16

This drawing in design and detail is the property of WBT, LLC, and must not be used except in connection with our work. All rights of design or invention are reserved.

CN

SIZE: A
Date: 6/10/09

REV: B

SCALE: 1:16

SHEET: 1 OF 1