


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A.	The Overall length	12/12/08	

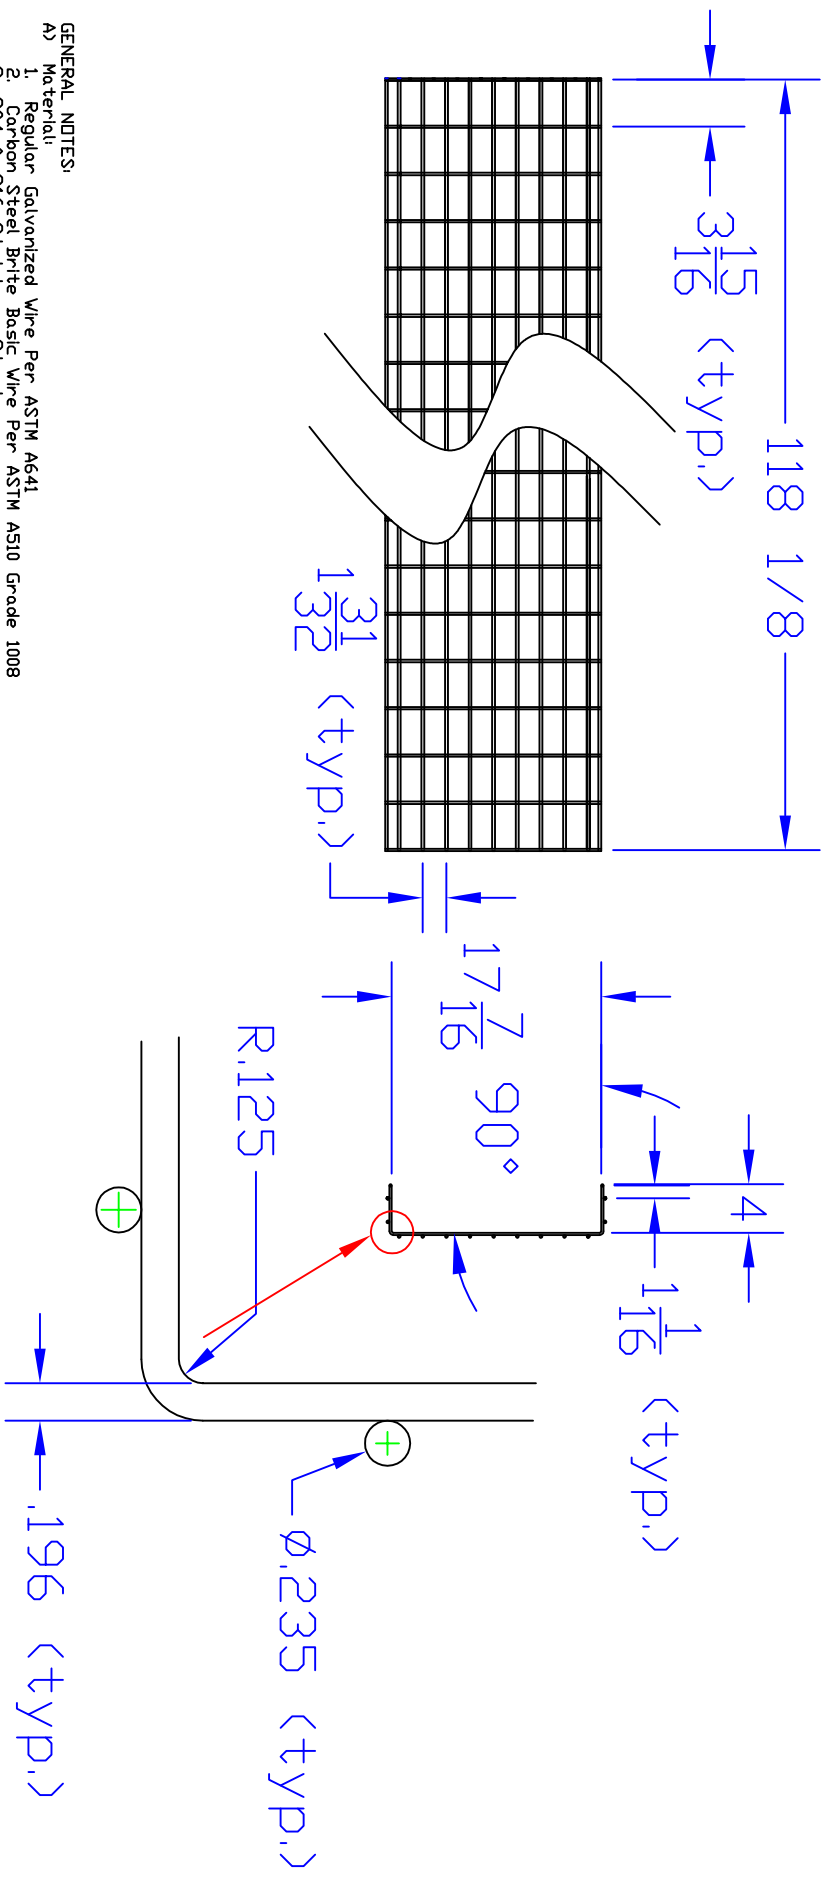

GENERAL NOTES:

- A) Material:
  1. Regular Galvanized Wire Per ASTM A641
  2. Carbon Steel Bright Basic Wire Per ASTM A510 Grade 1008
  3. 304 & 316 Stainless Steel
- B) Finish: (Carbon Steel Wire Only)
  1. Electrodeposited Zinc, Type III Finish
  - Service Condition (one) per ASTM B633
  2. Polyester Powder Coating 12 - 3.0 mills thick
- C) Dimensional Tolerances:
  1. General Dimensions: +/- 1/8" UNDI
  2. Length: +/- 1/4"
  3. Width: +/- 1/8"
  4. Depth: +/- 1/8"
  5. Angular Formation: +/- 3', -0
  6. Camber: Shall not exceed 1/2" on standard 10' length
  7. Twist: Shall not exceed 1/2" on standard 10' length
- D) Rib Wire Diameter:
  1. 19/32" Diameter
- E) Longitudinal Wire Diameter:
  1. .235" (6mm) Diameter
- F) Cross Section Area:
 

Area = (15 Wires)(0.438 in<sup>2</sup>) = .6570 in<sup>2</sup>

UL Marking= 4 in2

**WBT** LLC

WBT 4x18

CN

SIZE Date:

A 12-12-08

REV

SCALE 1:16

SHEET 1 OF 1