


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A.	The Overall length	12/12/08	

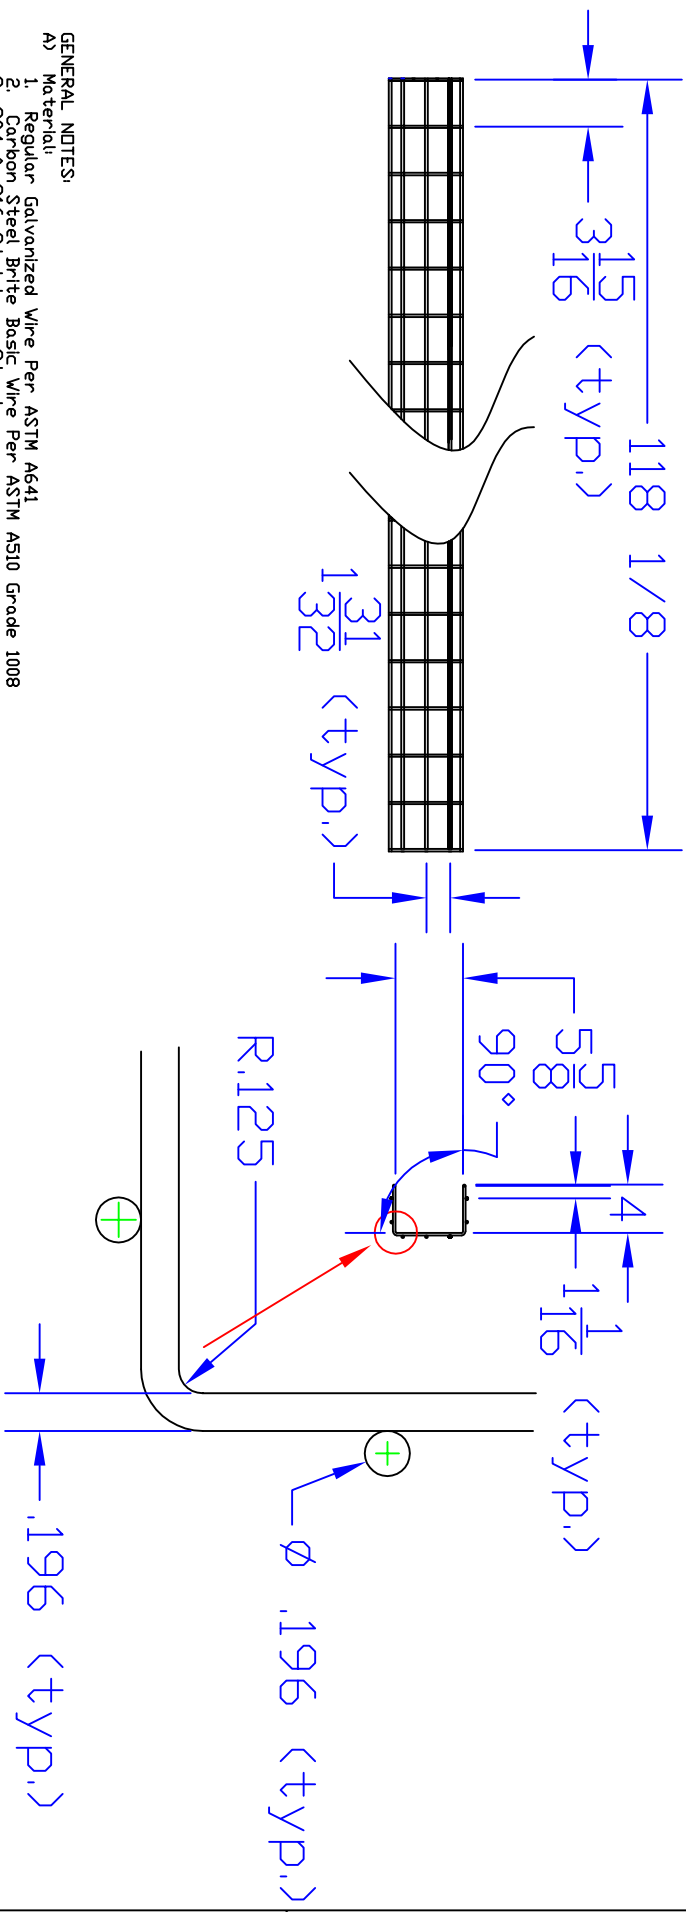

- GENERAL NOTES:**
- A) Materials:
 1. Regular Galvanized Wire Per ASTM A641
 2. Carbon Steel Bright Basic Wire Per ASTM A510 Grade 1008
 3. 304 & 316 Stainless Steel
 - B) Finish: (Carbon Steel Wire Only)
 1. Electrodeposited Zinc, Type III Finish
 2. Service Condition (one) per ASTM B633
 - C) Polyester Powder Coating 12 - 3.0 mils thick
 - D) Dimensional Tolerances:
 1. General Dimensions: +/- 1/8" UNL
 2. Length: +/- 1/4"
 3. Width: +/- 1/8"
 4. Depth: +/- 1/8"
 - E) Angular Formations: +/- 3', -0
 - F) Cambers: Shall not exceed 1/2" on standard 10' length
 - G) Twist: Shall not exceed 1/2" on standard 10' length
 - H) Rib Wire Diameter: 1.197" (3mm) Diameter
 - I) Longitudinal Wire Diameter: 1.197" (5mm) Diameter
 - J) Cross Section Area: Area = (9 Wires)(0.304 in²) = .2736 in²
 - K) UL Marking = 2 in2

WBT LLC

WBT 4x6

This drawing in design and detail is the property of WBT, LLC, and must not be used except in connection with our work. All rights of design or invention are reserved.

CN		SIZE: A	Date: 12-12-08	SCALE: 1:16	SHEET: 1 OF 1	REV:
----	--	---------	----------------	-------------	---------------	------