


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A.	The Overall length	12/12/08	

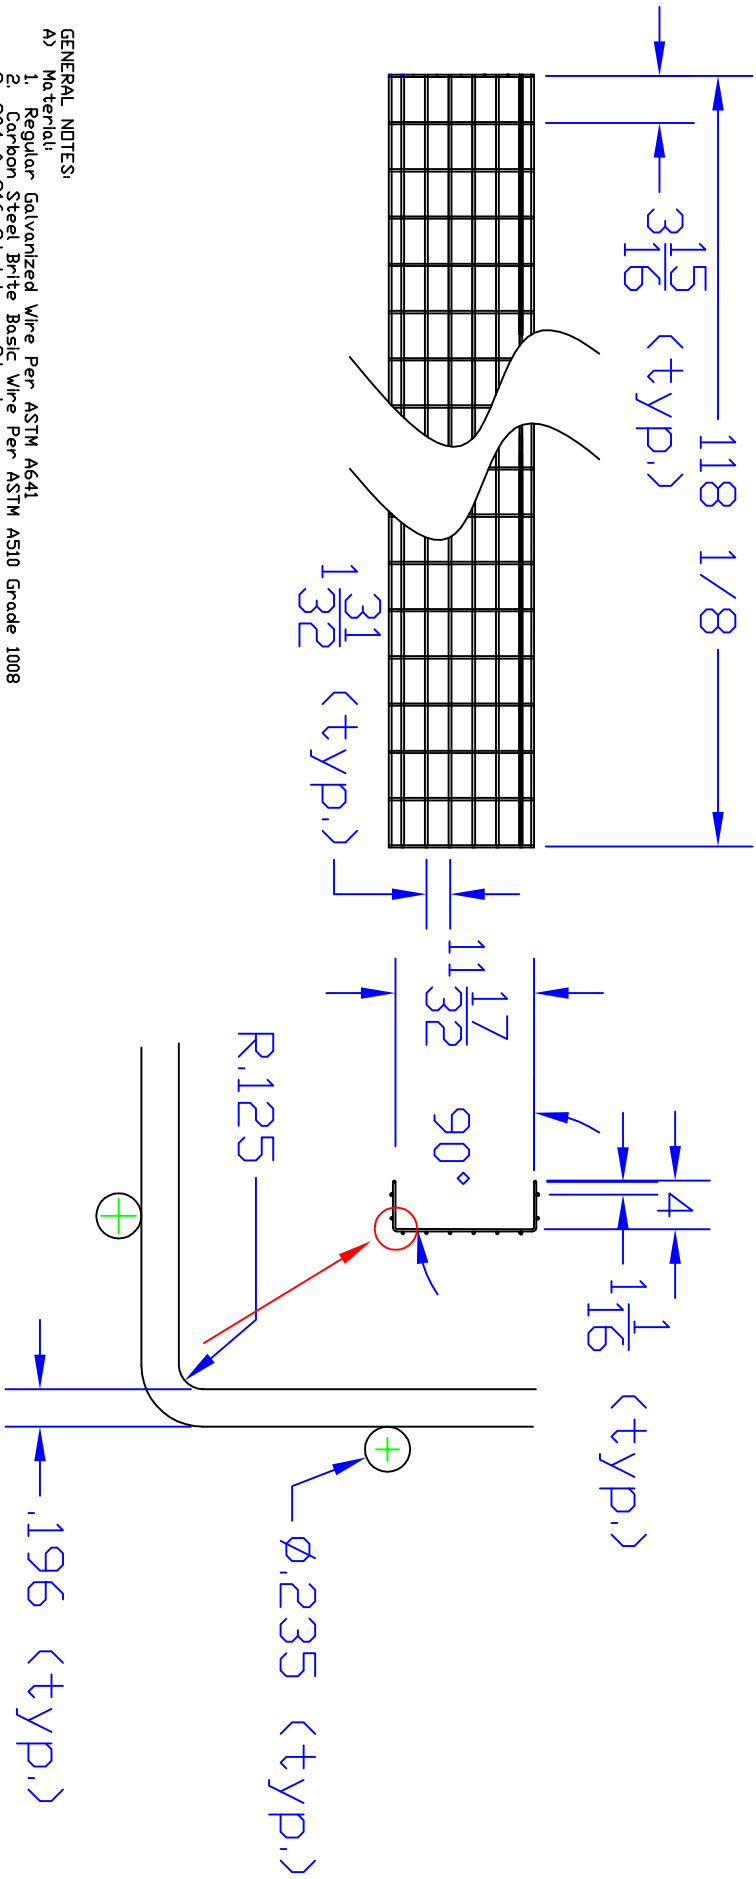

GENERAL NOTES:

- A) Material:
1. Regular Galvanized Wire Per ASTM A641
 2. Carbon Steel Brite Basic Wire Per ASTM A510 Grade 1008
 3. 304 & 316 Stainless Steel
- B) Finish: (Carbon Steel Wire Only)
1. Electrodeposited Zinc, Type III Finish
 - Service Condition: (one) per ASTM B633
 - Polyester Powder Coating 12 - 3.0 mils thick
- C) Dimensional Tolerances:
1. General Dimensions: +/- 1/8" UNDI
 2. Length: +/- 1/4"
 3. Width: +/- 1/8"
 4. Depth: +/- 1/8"
 5. Angular Formation: +/- 3', -0
 6. Cambers: Shall not exceed 1/2" on standard 10' length
 7. Twist: Shall not exceed 1/2" on standard 10' length
- D) Rib Wire Diameter:
1. 19/32" (5mm) Diameter
- E) Longitudinal Wire Diameter:
1. .235" (6mm) Diameter
- F) Cross Section Area:
- Area = (12 Wires)(0.438 in²) = .5256 in²
- UL Marking= 4 in2

WBT LLC

WBT 4x12

CN

SIZE Date:

A 12-12-08

REV

SCALE 1:16

SHEET 1 OF 1