


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A.	The Overall length	12/12/08	

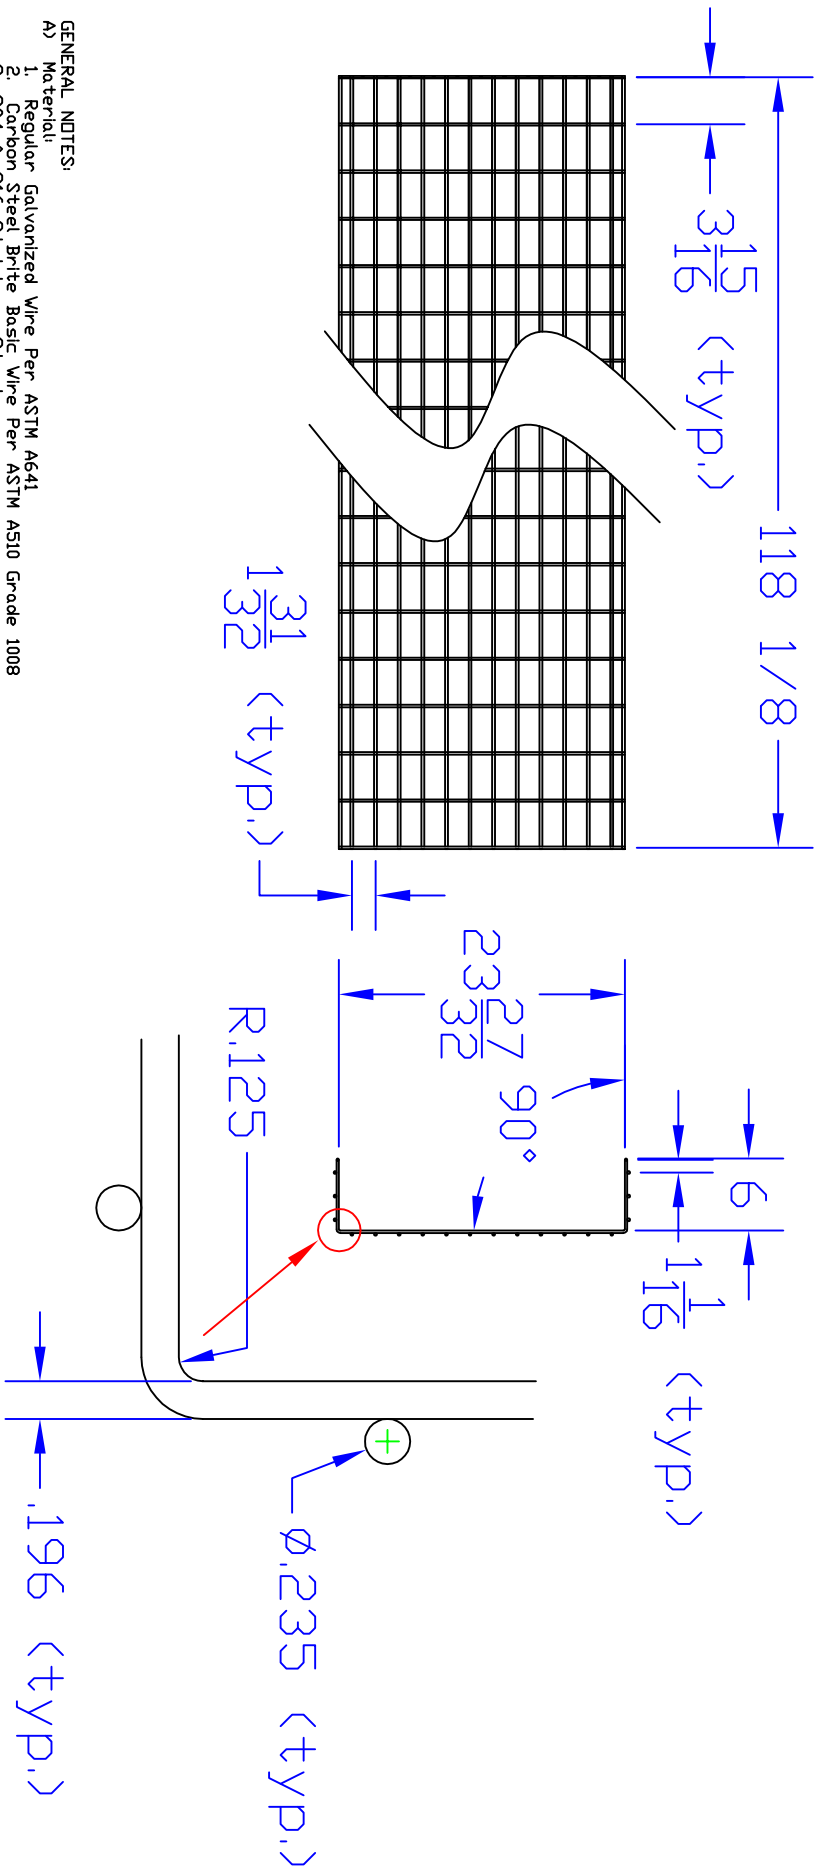

GENERAL NOTES:

- A) Material:
 1. Regular Galvanized Wire Per ASTM A641
 2. Carbon Steel Brite Basic Wire Per ASTM A510 Grade 1008
 3. 304 & 316 Stainless Steel
- B) Finish (Carbon Steel Wire Only)
 1. Electrodeposited Zinc, Type III Finish
 2. Polyester Powder Coating 12 - 3.0 mils thick
- C) Dimensional Tolerances:
 1. General Dimensions: +/- 1/8"
 2. Length: +/- 1/4"
 3. Width: +/- 1/8"
 4. Depth: +/- 1/8"
- D) Angular Formation: +/- 3', -0
- E) Camber: Shall not exceed 1/2" on standard 10' length
- F) Twist: Shall not exceed 1/2" on standard 10' length
- G) Rib Wire Diameter:
 1. 197' (5mm) Diameter
 2. 235' (6mm) Diameter
- H) Longitudinal Wire Diameter:
 1. 197' (5mm) Diameter
 2. 235' (6mm) Diameter
- I) Cross Section Area:

Area = (20 Wires)(0.438 in²) = .876 in²

UL Marking= 8 in²

WBT LLC

WBT 6x24

CN

SIZE Date:

A 12-12-08

REV

SCALE 1:16

SHEET 1 OF 1